


Pit Survey Form

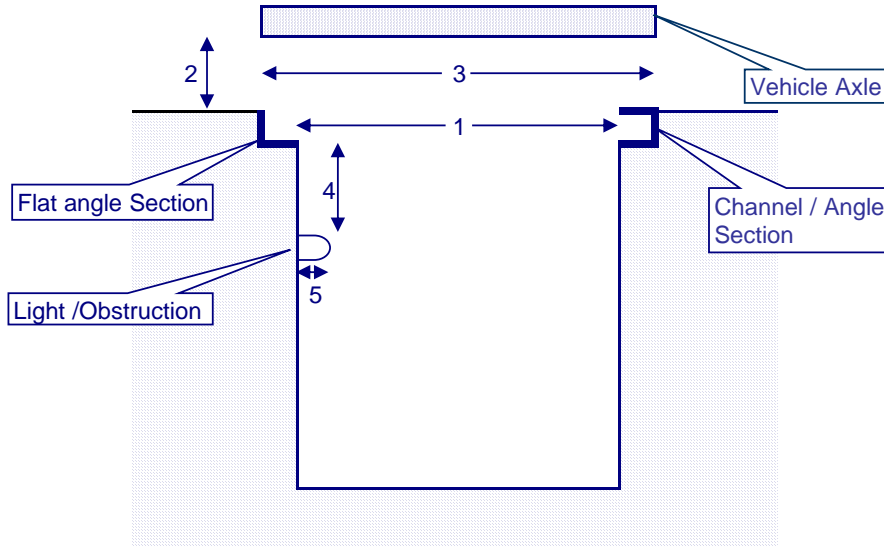

The information requested on this form is required to enable Autolift to supply a pit jack to you. It will allow your pit jack will fit into your pit and be operational within minutes of being delivered.

Pit / Customer Reference :-		
1	Width of the Pit. Check the whole length of the pit and record the maximum and minimum dimension	max
		min
2	Height between the underside of the lowest vehicle and floor level (*min 150mm)	
3	Width of the vertical Flanges. Check the whole length of the pit and record the maximum and minimum dimension	max
		min
4	Distance down from the rail bottom to the top edge of any protrusion from the pit wall	left side
		right side
5	Distance from the pit wall that any protrusion intrudes into the pit	left side
		right side
6	Specify if rails are Angle or Channel	
7	Internal dimensions of Angle or Channel	width
		height
Please advise of any information you think may be relevant not covered		

- * 150mm Standard Distance from floor level with dish head adaptor fitted
- 300mm Distance with 13 Tonne Fixed Spreader Beam and dish adaptor fitted
- 340mm Distance with 13 Tonne Telescopic Spreader Beam and dish adaptor fitted
- 200mm Distance with 2.8 Tonne spreader beam fitted